

DESIGNED AND ENGINEERED PUMPING SOLUTIONS



DAE Pumps

Designed And Engineered Pumping Solutions

VISIT SITE NOW >>

Clifton 675

Electric Submersible Pump



DAEPUMPS.COM

info@daepumps.com

(760) 821-8112

[VISIT SITE NOW »](#)

CLIFTON 675

10HP / 7.5KW

Electric Submersible Pumps



The DAE Pumps Clifton 675 dewatering pump is designed for professionals demanding dewatering tasks in mining, construction, and industrial environments. The Clifton 675 is a durable and reliable pump that can handle even the most challenging dewatering tasks. With a powerful motor and sturdy construction, the Clifton 675 is built to last. The compact design of this portable dewatering pump is slim and features our ACRS technology. They are cost-effective solutions. Our company is the best resource for making your profits real.

Clifton pumps are designed for long-term operation, high performance, and simple maintenance. They have been proven reliable and durable in demanding applications such as construction, mining, and tunneling. In these challenging environments, Clifton pumps have excelled. Their versatility, maneuverability, and rugged construction have made them indispensable in various applications.

The compact design of this portable dewatering pump is slim, lightweight, and features the ACRS technology. This makes them reliable and cost-effective. The ACRS technology makes the pump more reliable by ensuring that the pump will start up quickly and easily. The technology also makes the pump more cost-effective and energy efficient.

[VISIT SITE NOW »](#)




DAE Pumps

Designed And Engineered Pumping Solutions

VISIT SITE NOW »

Product Code	Clifton 675
Discharge Outlet	6 in (150 mm)
Shaft Speed	3450 RPM
Rated Output	10 HP (7.5 kW)
Rated Head	49 ft (15 m)
Rated Flow	423 GPM (26.7 L/s)
Max Head	92 ft (28 m)
Max Flow	594 GPM (37.5 L/s)
Solid Passage	1 in (15 mm)
Diameter	Ø13 in (317 mm)
Height	33 in (826 mm)
Weight	214 lbs (97 kg)

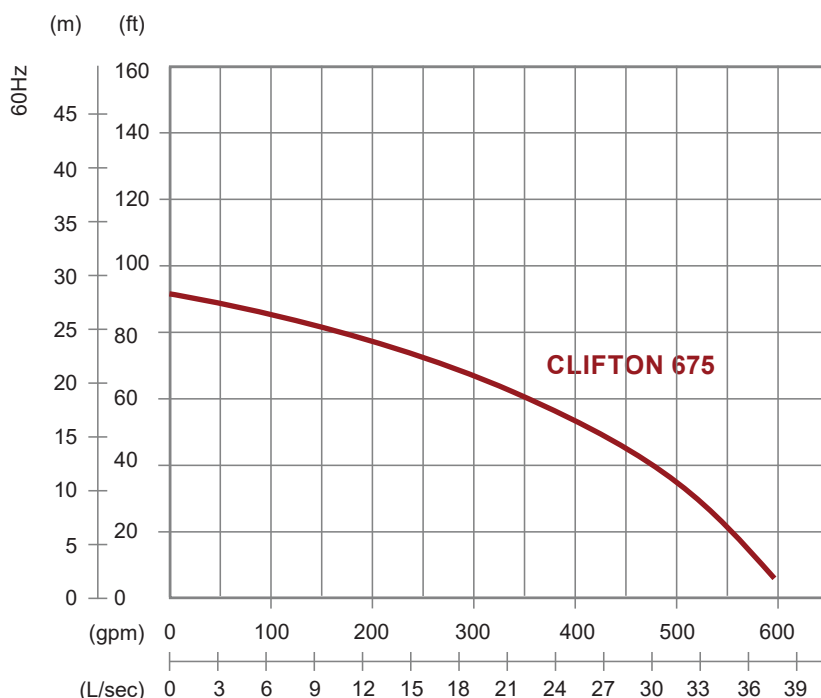

SPECIFICATION

Product Code	Specification
Type	Electric Submersible Pumps
Phase	3-Phase
Classification	IP 68
Motor	
- Type	Induction Motor
- Poles	2 Pole
- Insulation	Class F
- Protector	Circle Thermal Protector
- Start Method	D.O.L.
Lubricant	Food Grade (ISO VG32)
Shaft Seal	
- Type	Double Mechanical Seal
- Desc.	Silicon Carbide vs Ceramic / Carbon
Impeller Type	Opened

Product Code	Specification
Bearing	C3 Shielded Ball Bearings
Cable	
- Type	PVC (CSA Certified) / H07BQ-F
- Length	33 ft (10 m) or longer upon request
Materials	
- Pump Casing	Gray Iron
- Impeller	Chromium Iron
- Motor Frame	Stainless Steel
- Motor Shaft	Stainless Steel
- Strainer	Stainless Steel
Max. Liquid Temp.	104 °F (40 °C)
Max. Sub. Depth	66 ft (20 m)
pH Range	pH 5 - pH 8

VISIT SITE NOW »





ELECTRIC SUBMERSIBLE PUMPS

With a compact, slim design and the patented ACrS technology, these wear-resistant, portable dewatering pumps provide reliable and economical solutions.

Waterlight Cable Entry

An anti-wicking block is used to prevent water from entering the cable. Each conductor is then stripped and sealed in epoxy. This block stops moisture from reaching the motor chamber when the cable's end is damaged or submerged.

Multi-Direction Discharge Coupling

The discharge can be switched between horizontal and vertical directions. A vertical discharge connection comes standard on pumps with 7.5 HP or more.

Motor Protector

The motor incorporates a circle thermal protector, which protects against overheating and dry-run.

Top Discharge and Double Housing Design

Designed to construct a water jacket that provides a maximum motor cooling effect for continuous operation at low water levels, this feature forms the cylindrical and slim shape of the pump. It enables the pump to be installed in confined spaces.

Submersible Motor

The air-filled motor, housed in a watertight casing, conforms to Class F insulation.

C3 Ball Bearings and Hardened SS Shaft

High-quality C3 ball bearings and the well-balanced, hardened stainless steel shaft enhance stability during continuous pumping operations.

Double Mechanical Seals

Located in the oil chamber, the device is made of quality materials with highly wear-resistant silicon carbide on the lower side, providing extra protection against leakage and dry-run.

Extra Protection for Mechanical Seals and Shaft

Lip seals and shaft sleeves are utilized for additional protection against wear.

High Chrome Iron Impeller

Clifton's patent formula, ACrS Tech, is applied to all high chrome iron impellers. This technology increases wear resistance to particle abrasion.

